


JOB NAME: _____

DATE: _____

TYPE: _____

DIMENSIONS:

24"(L) x 48"(W) x 3-1/5"(H)

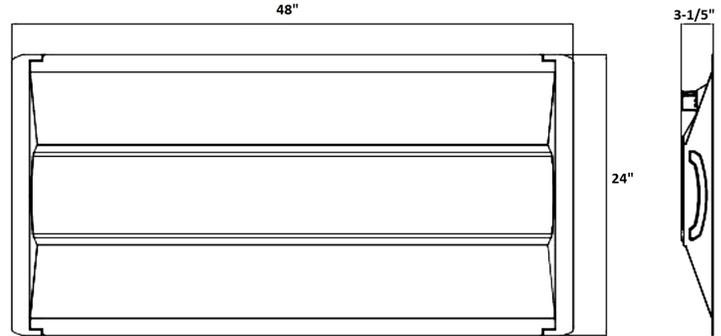

LTRP-2X4-50W-50K-D
LTRP-2X4-50W-40K-D

LED CENTER BASKET DURABLE TROFFER LIGHTS

Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

ELECTRICAL SPECIFICATIONS:

- Voltage: 100-277VAC 50/60Hz
- Wattage: 50W
- Power factor: >0.97
- Efficacy: 128~137LM/W

HOUSING SPECIFICATIONS:

- Exclusive design lens installs from opening on ends to prevent leakage of light
- Earthquake hooks built into housing
- Operating temperature: -20°F ~ 122°F
- Lifespan: 50,000 hrs.
- IP rating: IP20

CERTIFICATIONS: UL



LIGHTING SPECIFICATIONS:

- Dimming: 0~10V dimmable
- Lens: Polycarbonate
- Total lumens: 6400~6850LM
- Color temperature: 5000K/4000K
- Color rendering index: >80

WARRANTY: 5 years

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LTRP-2X4-50W-50K-D	50W	120~277VAC	6850LM	5000K
LTRP-2X4-50W-40K-D	50W	120~277VAC	6400LM	4000K

